

# HSF 3

## Advanced Finishing Glaze

### Description :

New generation of HSF 3 frictionless lubricating polisher, specially developed for different finishing applications: eliminates halos and whitish reflections on dark paints. Its finishing gloss is applied to all types of paints. Excellent for removing small scratches and cobwebs.


This new generation of HSF (Hologram Swirl Free) lubricant frictionless compound, specially formulated, uses a new low VOC lubricant process to be used for several finishing applications; prevents haze and swirl marks on dark colours. Produces a super wet look finish on all polished surface without using water, reducing splashing and clean up time.

### Advantages :

- Excellent to remove scratches and 2000 grit sand paper swirls.
- Ideal for new generation paint systems, cured paints and older finishes.
- Safe for body shops, silicone free, does not hide scratches.
- Ideal for blending-in, matching of gloss levels and general paint restoration.
- Reduces polish time by 50%.
- Formulated with lubricant that extends life of pad and assists in a smoother and easier running of the pad.

### Instructions :

- 1- Use the recommended polishing fluids HSF 1 (no. 671-032) and HSF 2 (no. 672-032) depending on the paint finish.
  - 2- Apply a good quantity of HSF 3 (no. 673-032) on the surface to be treated with a black foam finishing pad (velcro no. 4237).
  - 3- Use a variable speed polisher from 1200 to 1500 rpm. While applying medium pressure, let work the polisher slowly until an oily luster appears and then increase the speed to 1800 rpm to polish the surface to be polished, if necessary wipe with a micro fiber.
  - 4- For professional work, use Liquid Polymers Wax (no. 601-032) is recommended.
- Regular cleaning of the pad with help of pad washer (no. S2000) is highly recommended to avoid swirl marks and holograms.

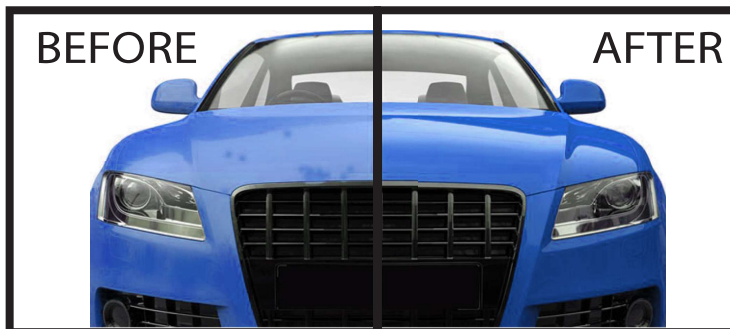

n° 673-032 6 X 1lt Box

n° 673-01 4 X 3.78lt Box