

## **CRYSTAL SEAL** Correcting Sealant

### Description :

Crystal seal is a new generation of sealant that corrects imperfection from polishing. Excellent for new or used cars. Easy to apply, its natural and synthetic components restore and protect all types of paints and all others surfaces like plastic, polycarbonate and chrome. Resists to extremely rough conditions like atmospheric contaminants, U.V. rays and oxidation. Crystal Seal is the latest innovation and the best paint treatment available on the market. apply by hand or with orbital polisher.

### Advantages :

- Can be applied by hand or with polisher.
- Can treat 6 medium size vehicles per 500 ML.
- Provides a minimum of 6 to 8 months durability.
- Provides a brilliant shine

### Instructions :

\* Start with the roof and continue with the hood, the trunk and the sides.


#### With the Polisher

- 1- Apply a good quantity of CRYSTAL SEAL on the surface to be treated using the velcro wool 40/60 1 ply sanding pad (# 4030). Spread the product approximately 60 cm<sup>2</sup> (2 square feet) before operating the polisher so as not to splash.
- 2- Use a variable speed polisher, i.e. from 1200 to 1500 rpm. While applying medium pressure, let work the polisher slowly until a glossy finish appears, if necessary wipe with a microfiber cloth.
- 3- For best results, repeat step (1) using a black foam finishing pad (velcro # 4237). Reduce the pressure and increase the speed to 1800 rpm to buff the polished surface.

#### By hand

- 1- Apply the product on the painted surface with a wet wax applicator and let dry to obtain a fog. (5 minutes).
- 2- Remove the residue with a clean polishing cloth.

It is strongly recommended to clean your polishing pads using the pad wringer (no. S2000) to have the least amount of swirls and holograms possible.

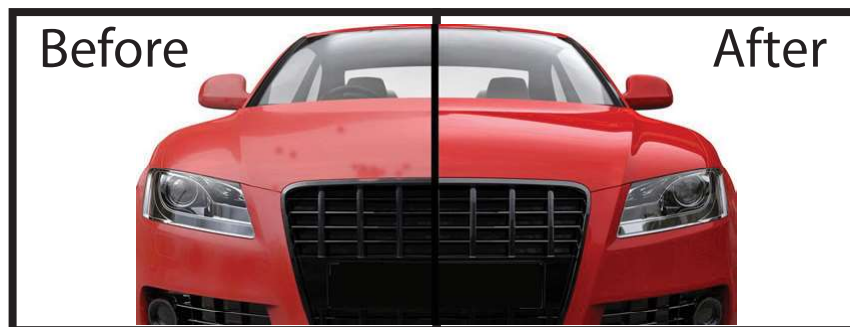

n° 680-016 6 X 500ml Box / n° 680-032 6 X 1lt Box